




Test Report issued under the responsibility of:



TEST REPORT IEC 61683 Photovoltaic systems – Power conditioners – Procedure for measuring efficiency	
Report Number.....	GZES220400574503
Date of issue	2022-06-09
Total number of pages.....	60
Name of Testing Laboratory preparing the Report	SGS-CSTC Standards Technical Services Co., Ltd., E&E Lab Guangzhou
Address	198 Kezhu Road, Science City, Economic & Technology Development Area, Guangzhou, Guangdong, China
Applicant's name	AISWEI Technology (Shanghai) Co., Ltd.
Address	Room 905B, 757 Mengzi Road, Huangpu District, 200023 Shanghai, China
Test specification:	
Standard.....	IEC 61683:1999 (First Edition)
Test procedure.....	SGS-CSTC
Non-standard test method.....	N/A
Test Report Form No.	IEC 61683B
Test Report Form(s) Originator....	SGS-CSTC
Master TRF.....	Dated 2017-11
Copyright © 2014 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.	
This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.	
General disclaimer:	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.	

Test item description :	Grid-connected PV Inverter
Trade Mark :	
Manufacturer :	AISWEI Technology (Shanghai) Co., Ltd.
Address :	Room 905B, 757 Mengzi Road, Huangpu District, 200023 Shanghai, China
Model/Type reference :	ASW20K-LT-G2 Pro, ASW17K-LT-G2 Pro, ASW15K-LT-G2 Pro, ASW13K-LT-G2 Pro, ASW12K-LT-G2 Pro, ASW10K-LT-G2 Pro, ASW8K-LT-G2 Pro, ASW6K-LT-G2 Pro, ASW5K-LT-G2 Pro, ASW4K-LT-G2 Pro, ASW3K-LT-G2 Pro.
Ratings :	Refer to the rating on page 6 and 7 of this report Serial Number: SP00100032220003 (Model: ASW8K-LT-G2 Pro) and SZ00200012110003 (Model: ASW20K-LT-G2 Pro) (The Equipment parameters were changed by software) Master Firmware version: V610-03043-01 Slave Firmware version: V610-60009-00 Safety Firmware version: V610-11009-00

Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):		
Testing Laboratory:	SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch	
Location/ address:	198 Kezhu Road, Science City, Economic & Technology Development Area, Guangzhou, Guangdong, China	
Tested by (name, function, signature):	Hugo Zhang (Project Engineer)	
Approved by (name, function, signature):	Roger Hu (Technical Reviewer)	

List of Attachments (including a total number of pages in each attachment):		
50 Hz		
Attachment #	Description	Pages
Attachment I	Pictures of the EUT and Electrical Schemes	7 pages
Attachment II	Testing Information	5 pages
Summary of testing:		
<p>Tests performed (name of test and test clause):</p> <p>The equipment has been tested according to the standard: IEC 61683:1999. Testing has been carried out at 50Hz.</p> <p>All applicable tests according to the above specified standard have been carried out.</p> <p>From the result of inspection and tests on the submitted sample, we conclude that it complies with the requirements of the standard.</p> <p>Note: Output voltage is 230Va.c.</p>	<p>Testing location: See page 2</p>	
Summary of compliance with National Differences		
No National Differences are addressed to this test report		

Copy of marking plate(representative):

Solplanet

Model: ASW20K-LT-G2 Pro

Max. input voltage	d.c. 1100V
MPP voltage range	d.c. 150-1000V
Max. input current	d.c. 32A/32A
Isc PV(absolute maximum)	d.c. 48A/48A
Rated grid voltage	3/N/PE~ 380/400/415V
Rated grid frequency	50/60Hz
Rated AC output active power	20000W
Rated AC output apparent power	20000VA
Max. AC output apparent power	22000VA ¹
Max. continuous output current	a.c. 31.9A
Adjustable cos(φ)	0.8ind...0.8cap
Operating temperature range	-25...+60°C
Topology	non-isolated
Ingress protection	IP 65
Protective class	I
Overvoltage category	II(PV) III(MAINS)

¹ For European market S_{max}=20000VA

AISWEI Technology (Shanghai) Co., Ltd.
 Hotline: +86 400 801 9996
 Web: www.solplanet.net
 Add.: Room 905B, 757 Mengzi Road, Huangpu District,
 Shanghai, 200023, China

XXXXXXXXXXXXXXXXXX XX-XX

532-100008-00 Made in China

Note:

1. The above markings are the minimum requirements required by the safety standard. For the final production samples, the additional markings which do not give rise to misunderstanding may be added.
2. Label is attached on the side surface of enclosure and visible after installation
3. Labels of other models are as the same with **ASW20K-LT-G2 Pro**'s except the parameters of rating.
4. As declared by the applicant, the importer (and manufacturer, if it is different)'s name, registered trade name or registered trademark and the postal address will be marked on the products before being place on the market. The contact details shall be in a language easily understood by end-users and market surveillance authorities.



Test item particulars : Three Phase Grid-connected PV Inverter	
Classification of installation and use : Fixed (permanent connection)	
Supply Connection : DC; PV : AC; Grid connection	
Possible test case verdicts: - test case does not apply to the test object : N/A - test object does meet the requirement : P (Pass) - test object does not meet the requirement : F (Fail)	
Testing : Date of receipt of test item : N/A Date (s) of performance of tests : From 2021-03-25 to 2021-04-08 and From 2022-04-24 to 2022-04-26	
General remarks: "(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report. This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm . Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.	
Manufacturer's Declaration per sub-clause 4.2.5 of IEC 61837-2:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable
When differences exist; they shall be identified in the General product information section.	
Name and address of factory (ies) : AISWEI New Energy Technology (Yangzhong) Co., Ltd. No.588 Gangxing Road, Yangzhong, Jiangsu, China	

General product information:

Product covered by this report is a three-phase transformerless string inverter with two independent MPPTs. It converts the direct current (DC) generated by the photovoltaic (PV) module into a three-phase alternating current (AC) and feeds it into the utility grid.

Equipment Under Testing:

- ASW20K-LT-G2 Pro
- ASW17K-LT-G2 Pro
- ASW15K-LT-G2 Pro
- ASW13K-LT-G2 Pro
- ASW12K-LT-G2 Pro
- ASW10K-LT-G2 Pro
- ASW8K-LT-G2 Pro
- ASW6K-LT-G2 Pro
- ASW5K-LT-G2 Pro
- ASW4K-LT-G2 Pro
- ASW3K-LT-G2 Pro

Product Model	ASW3K-LT-G2 Pro	ASW4K-LT-G2 Pro	ASW5K-LT-G2 Pro	ASW6K-LT-G2 Pro
Input (DC)				
Max. PV modules power (W)	4500	6000	7500	9000
Max. input voltage (V)	1100			
Initial feed-in voltage (V)	180			
Min. input voltage (V)	125			
Rated input voltage (V)	560			
MPPT Voltage Range (V)	150 ~ 1000			
Full load DC voltage range (V)	270 ~ 850			
Max. DC input current (A)	16/16			
Number of MPPT/ Strings per MPPT	2/ 1+1			
Output (AC)				
Max. Output apparent power (VA)	3300	4400	5500	6600
Rated Output power (W)	3000	4000	5000	6000
Max. AC Output Current (A)	3*4.8	3*6.4	3*8.0	3*9.6
Rated AC Output Current (A) ⁽¹⁾	3*4.3	3*5.8	3*7.2	3*8.7
Nominal Grid Voltage (V)	230/400 (3/N/PE)			
Nominal Frequency (Hz)	50			
Power factor	0.8 ind ~ 0.80 cap			
Topology	non-isolated			
Operating temperature range	-25 ~ +60 °C			
Degree of protection	IP65			

⁽¹⁾ The rated currents are calculated from rated power and voltage as the reference current value.

Product Model	ASW8K-LT-G2 Pro	ASW10K-LT-G2 Pro	ASW12K-LT-G2 Pro	ASW13K-LT-G2 Pro
Input (DC)				
Max. PV modules power (W)	12000	15000	18000	195000
Max. input voltage (V)	1100			
Initial feed-in voltage (V)	180			
Min. input voltage (V)	125			
Rated input voltage (V)	630			
MPPT Voltage Range (V)	150 ~ 1000			
Full load DC voltage range (V)	400 ~ 850			
Max. DC input current (A)	20/16		32/20	
Number of MPPT/ Strings per MPPT	2/ 1+1		2/ 2+1	
Output (AC)				
Max. Output apparent power (VA)	8800	11000	13200	14300
Rated Output power (W)	8000	10000	12000	13000
Max. AC Output Current (A)	3*12.8	3*16.0	3*19.1	3*20.7
Rated AC Output Current (A) ⁽¹⁾	3*11.6	3*14.5	2*17.4	3*18.8
Nominal Grid Voltage (V)	230/400 (3/N/PE)			
Nominal Frequency (Hz)	50			
Power factor	0.8 ind ~ 0.80 cap			
Topology	non-isolated			
Operating temperature range	-25 ~ +60 °C			
Degree of protection	IP65			

Product Model	ASW15K-LT-G2 Pro	ASW17K-LT-G2 Pro	ASW20K-LT-G2 Pro
Input (DC)			
Max. PV modules power (W)	225000	255000	30000
Max. input voltage (V)	1100		
Initial feed-in voltage (V)	180		
Min. input voltage (V)	125		
Rated input voltage (V)	630		
MPPT Voltage Range (V)	150 ~ 1000		
Full load DC voltage range (V)	400 ~ 850		
Max. DC input current (A)	32/20	32/32	
Number of MPPT/ Strings per MPPT	2/ 2+1	2/ 2+2	
Output (AC)			
Max. Output apparent power (VA)	16500	18700	22000
Rated Output power (W)	15000	17000	20000
Max. AC Output Current (A)	3*24.0	3*27.1	3*31.9
Rated AC Output Current (A) ⁽¹⁾	3*21.7	3*24.6	3*29.0
Nominal Grid Voltage (V)	230/400 (3/N/PE)		
Nominal Frequency (Hz)	50		
Power factor	0.8 ind ~ 0.80 cap		
Topology	non-isolated		
Operating temperature range	-25 ~ +60 °C		
Degree of protection	IP65		

⁽¹⁾ The rated currents are calculated from rated power and voltage as the reference current value.

IEC 61683: 1999			
Clause	Requirement – Test	Measuring result – Remark	Verdict
4	Efficiency measurement conditions		P
	Efficiency is measured under the conditions in the following clauses.		P
	Specific conditions may be excluded by mutual agreement when those conditions are outside the manufacturer's allowable operating range.		P
4.1	DC power source for testing		P
	For power conditioners operating with fixed input voltage, the d.c. power source is a storage battery or constant voltage power source to maintain the input voltage.		N/A
	For power conditioners that employ maximum power point tracking (MPPT) and shunt-type power conditioners, either a photovoltaic array or a photovoltaic array simulator is utilized.		P
4.2	Temperature		P
	All measurements are to be made at an ambient temperature of 25 °C ± 2 °C.		N/A
	Other ambient temperatures may be allowed by mutual agreement. However, the temperature used must be clearly stated in all documentation.	By mutual agreement all measurements at 50 Hz have been carried out at 25°C±5°C	P
4.3	Output voltage and frequency		P
	The output voltage and frequency are maintained at the manufacturer's stated nominal values.	230 V, 50 Hz	P
4.4	Input voltage		P
	Measurements performed in each of the following tests are repeated at three power conditioner input voltages: a) manufacturer's minimum rated input voltage; b) the inverter's nominal voltage or the average of its rated input range; c) 90 % of the inverter's maximum input voltage.		P
	In the case where a power conditioner is to be connected with a battery at its input terminals, only the nominal or rated input voltage may be applied.		N/A

IEC 61683: 1999			
Clause	Requirement – Test	Measuring result – Remark	Verdict
4.5	Ripple and distortion		P
	Record input voltage and current ripple for each measurement. Also record output voltage and current distortion (if a.c.) or ripple (if d.c.). Ensure that these measurements remain within the manufacturer's specified values.		P
4.6	Resistive loads/utility grid		P
	At unity power factor, or at the intrinsic power factor of grid-connected inverters without power factor adjustment, measure the efficiency for power levels of 10 %, 25 %, 50 %, 75 %, 100 % and 120 % of the inverter's rating.		P
	Stand-alone inverters are also measured at a power level of 5 % of rated. The power conditioner test is conducted with a specified resistive and reactive grid impedance.		N/A
4.7	Reactive loads		N/A
	For stand-alone inverters, measure the efficiency with a load which provides a power factor equal to the manufacturer's specified minimum level (or 0,25, whichever is greater) and at power levels of 25 %, 50 % and 100 % of rated VA.		N/A
	Repeat for power factors of 0,5 and 0,75 (do not go below the manufacturer's specified minimum PF) and power levels of 25 %, 50 %, and 100 % of rated VA.		N/A
4.8	Resistive plus non-linear loads		N/A
	For stand-alone inverters, measure the efficiency with a fixed non-linear load (total harmonic distortion (THD) = $(80 \pm 5) \%$) equal to $(25 \pm 5) \%$ of the inverter's rated VA plus sufficient resistive load in parallel to achieve a total load of 25 %, 50 % and 100 % of rated VA.		N/A
	Repeat the measurements with a fixed non-linear load equivalent to $(50 \pm 5) \%$ of the inverter's rated VA plus sufficient resistive load in parallel to achieve a total load of 50% and 100% of rated VA.		N/A
	The type of non-linear load must be clearly stated in all documentation.		N/A

IEC 61683: 1999			
Clause	Requirement – Test	Measuring result – Remark	Verdict
4.9	Complex loads		N/A
	When a non-linear plus a sufficient reactive load condition is specified for stand-alone inverters, measure the efficiency with a fixed non-linear load (THD = $(80 \pm 5) \%$) equal to $(50 \pm 5) \%$ of the inverter's rated VA plus a sufficient reactive load (PF = 0,5) in parallel to achieve a total load of 50 % and 100 % of rated VA.		N/A
	The type of complex load is clearly stated in all documentation.		N/A
5	Efficiency calculations		P
5.1	Rated output efficiency		P
5.2	Partial output efficiency		P
5.3	Energy efficiency		P
5.4	Efficiency tolerances		P
6	Conditions of loading for output ports		P
6.1	Test circuit		P
	Figure 1a is applied to standard-alone power conditioners		N/A
	<p>Figure 1a – Stand-alone type</p>		N/A
	Figure 1b is applied to utility-interactive power conditioners		P
	<p>Figure 1b – Utility-interactive type</p> <p> PS power conditioner PS variable voltage-current d.c. power supply A₁ DC ammeter A₂ AC or d.c. ammeter W₁ DC wattmeter W₂ AC or d.c. wattmeter L load F frequency meter V₁ DC voltmeter V₂ AC or d.c. voltmeter PF power factor meter </p>		P

IEC 61683: 1999			
Clause	Requirement – Test	Measuring result – Remark	Verdict
6.2	Measurement procedure		P
7	Loss measurement		P
7.1	No-load loss		P
7.2	Standby loss		P
Annex A	Power conditioner description		P
Annex B	Power efficiency and conversion factor		P
Annex C	Weighted-average energy efficiency		P
Annex D	Derivation of efficiency tolerance in table 2		P

TABLE		Efficiency recording and efficient calculation sheet							
power conditioner type	Grid-connected								
Model:	ASW20K-LT-G2 Pro								
Parameters of power conditioner	Minimum rated input voltage:125 V Nominal voltage: 630 V Maximum input voltage: 1100 V MPPT voltage range: 150 ~ 1000 V MPPT voltage range with full power: 400 ~ 850 V Rated output voltage: 230 V Rated output frequency: 50 Hz Rated output power: 20000 W Note: According to the user manual, the minimum MPPT input voltage is 150 V, and 90% of the inverter's maximum MPPT input voltage is 90%*1000 V=900 V. However, in this range, the inverter can't output full power. So, for this test, 400 V were used instead of 150 V, and 850 V were used instead of 900 V.								
PV input voltage	a) Manufacturer's minimum rated input voltage 400 V (±6 V)								
Temperature (°C)	25 °C ± 5 °C								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	402.4	402.5	402.7	402.8	402.9	/	/	/
Input voltage ripple (V)	/	4.0	4.0	3.9	4.1	3.6	/	/	/
Input current (A)	/	4.2	8.0	13.7	20.1	26.6	/	/	/
Input current ripple (A)	/	0.3	0.3	0.3	0.3	0.3	/	/	/
Input power (Pi) (kW)	/	2.245	5.577	10.403	15.467	20.507	/	/	/
Output power (Po) (kW)	/	2.154	5.417	10.127	15.024	19.857	/	/	/
Output efficiency (%)	/	95.9	97.1	97.3	97.1	96.8	/	/	/
Input energy (Wi) (Wh)	/	73.7	181.1	337.8	502.7	656.2	/	/	/
Output energy (Wo) (Wh)	/	70.7	175.9	328.9	488.3	635.4	/	/	/
Energy efficiency(%)	/	95.9	97.1	97.4	97.1	96.8	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

PV input voltage	b) The inverter's nominal voltage 630 V (± 9.45 V)								
Temperature ($^{\circ}\text{C}$)	25 $^{\circ}\text{C} \pm 5$ $^{\circ}\text{C}$								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	629.4	626.5	629.5	630.7	631.3	/	/	/
Input voltage ripple (V)	/	1.3	1.3	1.1	1.6	1.4	/	/	/
Input current (A)	/	1.7	4.1	8.1	12.1	16.1	/	/	/
Input current ripple (A)	/	0.0	0.0	0.0	0.0	0.0	/	/	/
Input power (Pi) (kW)	/	2.076	5.091	10.190	15.281	20.366	/	/	/
Output power (Po) (kW)	/	2.013	5.003	10.027	15.016	19.977	/	/	/
Output efficiency (%)	/	97.0	98.3	98.4	98.3	98.1	/	/	/
Input energy (Wi) (Wh)	/	68.0	152.6	327.5	490.3	654.5	/	/	/
Output energy (Wo) (Wh)	/	65.9	150.0	322.3	481.8	642.0	/	/	/
Energy efficiency(%)	/	97.0	98.3	98.4	98.3	98.1	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

PV input voltage	c) 90% of the inverter's maximum input voltage 850 V (± 12.75 V)								
Temperature ($^{\circ}$ C)	25 $^{\circ}$ C \pm 5 $^{\circ}$ C								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	843.9	849.7	849.9	850.1	850.1	/	/	/
Input voltage ripple (V)		1.7	1.1	0.5	1.5	1.7	/	/	/
Input current (A)	/	1.3	3.0	6.0	9.1	12.0	/	/	/
Input current ripple (A)		0.0	0.0	0.0	0.0	0.1	/	/	/
Input power (Pi) (kW)	/	2.173	5.144	10.277	15.462	20.392	/	/	/
Output power (Po) (kW)	/	2.077	5.003	10.035	15.085	19.862	/	/	/
Output efficiency(%)	/	95.6	97.3	97.6	97.6	97.4	/	/	/
Input energy (Wi) (Wh)	/	68.0	168.0	336.0	503.4	658.8	/	/	/
Output energy (Wo) (Wh)	/	64.9	163.4	328.1	491.1	641.7	/	/	/
Energy efficiency(%)	/	95.4	97.3	97.6	97.6	97.4	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

TABLE		Efficiency recording and efficient calculation sheet							
power conditioner type	Grid-connected								
Model:	ASW17K-LT-G2 Pro								
Parameters of power conditioner	Minimum rated input voltage:125 V Nominal voltage: 630 V Maximum input voltage: 1100 V MPPT voltage range: 150 ~ 1000 V MPPT voltage range with full power: 400 ~ 850 V Rated output voltage: 230 V Rated output frequency: 50 Hz Rated output power: 17000 W Note: According to the user manual, the minimum MPPT input voltage is 150 V, and 90% of the inverter's maximum MPPT input voltage is 90%*1000 V=900 V. However, in this range, the inverter can't output full power. So, for this test, 400 V were used instead of 150 V, and 850 V were used instead of 900 V.								
PV input voltage	a) Manufacturer's minimum rated input voltage 400 V (± 6 V)								
Temperature ($^{\circ}$ C)	25 $^{\circ}$ C \pm 5 $^{\circ}$ C								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	402.4	402.5	402.6	402.7	402.8	/	/	/
Input voltage ripple (V)	/	3.9	4.1	4.0	4.0	4.2	/	/	/
Input current (A)	/	3.6	6.8	11.8	17.1	22.7	/	/	/
Input current ripple (A)	/	0.3	0.3	0.3	0.3	0.3	/	/	/
Input power (Pi) (kW)	/	1.823	4.440	8.781	13.116	17.508	/	/	/
Output power (Po) (kW)	/	1.740	4.303	8.549	12.762	17.003	/	/	/
Output efficiency (%)	/	95.4	96.9	97.4	97.3	97.1	/	/	/
Input energy (Wi) (Wh)	/	59.8	145.7	284.4	433.5	570.5	/	/	/
Output energy (Wo) (Wh)	/	57.1	141.1	276.9	421.8	554.0	/	/	/
Energy efficiency(%)	/	95.5	96.8	97.4	97.3	97.1	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

PV input voltage	b) The inverter's nominal voltage 630 V (± 9.45 V)								
Temperature ($^{\circ}$ C)	25 $^{\circ}$ C \pm 5 $^{\circ}$ C								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	639.7	629.3	630.5	629.3	630.3	/	/	/
Input voltage ripple (V)	/	1.2	1.2	1.2	1.4	0.9	/	/	/
Input current (A)	/	1.4	3.5	6.9	10.2	13.7	/	/	/
Input current ripple (A)	/	0.0	0.0	0.0	0.0	0.0	/	/	/
Input power (Pi) (kW)	/	1.780	4.341	8.643	12.782	17.322	/	/	/
Output power (Po) (kW)	/	1.727	4.261	8.504	12.568	17.013	/	/	/
Output efficiency (%)	/	97.0	98.2	98.4	98.3	98.2	/	/	/
Input energy (Wi) (Wh)	/	54.0	137.9	277.0	406.2	557.7	/	/	/
Output energy (Wo) (Wh)	/	52.4	135.4	272.6	399.4	547.7	/	/	/
Energy efficiency(%)	/	97.0	98.2	98.4	98.3	98.2	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

PV input voltage	c) 90% of the inverter's maximum input voltage 850 V (± 12.75 V)								
Temperature ($^{\circ}$ C)	25 $^{\circ}$ C \pm 5 $^{\circ}$ C								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	849.2	849.3	849.4	849.4	850.2	/	/	/
Input voltage ripple (V)		0.6	0.8	0.8	0.7	1.2	/	/	/
Input current (A)	/	1.1	2.6	5.2	7.7	10.3	/	/	/
Input current ripple (A)		0.0	0.0	0.0	0.0	0.0	/	/	/
Input power (Pi) (kW)	/	1.786	4.356	8.740	13.124	17.505	/	/	/
Output power (Po) (kW)	/	1.683	4.212	8.506	12.776	17.059	/	/	/
Output efficiency(%)	/	94.2	96.7	97.3	97.3	97.5	/	/	/
Input energy (Wi) (Wh)	/	58.3	142.5	286.5	427.6	575.7	/	/	/
Output energy (Wo) (Wh)	/	55.0	137.8	278.8	416.3	561.0	/	/	/
Energy efficiency(%)	/	94.3	96.7	97.3	97.4	97.4	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

TABLE		Efficiency recording and efficient calculation sheet							
power conditioner type	Grid-connected								
Model:	ASW15K-LT-G2 Pro								
Parameters of power conditioner	Minimum rated input voltage:125 V Nominal voltage: 630 V Maximum input voltage: 1100 V MPPT voltage range: 150 ~ 1000 V MPPT voltage range with full power: 400 ~ 850 V Rated output voltage: 230 V Rated output frequency: 50 Hz Rated output power: 15000 W Note: According to the user manual, the minimum MPPT input voltage is 150 V, and 90% of the inverter's maximum MPPT input voltage is 90%*1000 V=900 V. However, in this range, the inverter can't output full power. So, for this test, 400 V were used instead of 150 V, and 850 V were used instead of 900 V.								
PV input voltage	a) Manufacturer's minimum rated input voltage 400 V (±6 V)								
Temperature (°C)	25 °C ± 5 °C								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	402.4	402.5	402.6	402.6	402.7	/	/	/
Input voltage ripple (V)	/	4.1	4.2	4.1	4.1	4.1	/	/	/
Input current (A)	/	3.3	6.2	10.5	15.3	20.2	/	/	/
Input current ripple (A)	/	0.3	0.3	0.3	0.3	0.3	/	/	/
Input power (Pi) (kW)	/	1.575	3.887	7.765	11.671	15.517	/	/	/
Output power (Po) (kW)	/	1.497	3.759	7.559	11.364	15.090	/	/	/
Output efficiency (%)	/	95.0	96.7	97.3	97.4	97.2	/	/	/
Input energy (Wi) (Wh)	/	51.3	126.6	252.7	381.9	512.1	/	/	/
Output energy (Wo) (Wh)	/	48.8	122.5	246.0	371.8	498.0	/	/	/
Energy efficiency(%)	/	95.1	96.8	97.3	97.4	97.2	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

PV input voltage	b) The inverter's nominal voltage 630 V (± 9.45 V)								
Temperature ($^{\circ}\text{C}$)	25 $^{\circ}\text{C} \pm 5$ $^{\circ}\text{C}$								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	629.4	629.4	627.5	631.1	629.3	/	/	/
Input voltage ripple (V)	/	1.0	0.9	1.2	1.1	1.1	/	/	/
Input current (A)	/	1.3	3.0	6.1	9.1	12.1	/	/	/
Input current ripple (A)	/	0.0	0.0	0.0	0.0	0.0	/	/	/
Input power (Pi) (kW)	/	1.563	3.808	7.693	11.489	15.276	/	/	/
Output power (Po) (kW)	/	1.505	3.723	7.570	11.303	15.014	/	/	/
Output efficiency (%)	/	96.3	97.8	98.4	98.4	98.3	/	/	/
Input energy (Wi) (Wh)	/	50.7	124.5	242.8	369.6	490.5	/	/	/
Output energy (Wo) (Wh)	/	48.8	121.7	238.9	363.6	482.1	/	/	/
Energy efficiency(%)	/	96.3	97.8	98.4	98.4	98.3	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

PV input voltage	c) 90% of the inverter's maximum input voltage 850 V (± 12.75 V)								
Temperature ($^{\circ}$ C)	25 $^{\circ}$ C \pm 5 $^{\circ}$ C								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	849.2	849.2	849.9	850.0	850.1	/	/	/
Input voltage ripple (V)		1.1	1.3	0.8	0.8	0.8	/	/	/
Input current (A)	/	1.0	2.3	4.6	6.8	9.1	/	/	/
Input current ripple (A)		0.0	0.0	0.0	0.0	0.0	/	/	/
Input power (Pi) (kW)	/	1.676	3.876	7.704	11.569	15.462	/	/	/
Output power (Po) (kW)	/	1.574	3.741	7.515	11.294	15.085	/	/	/
Output efficiency(%)	/	93.9	96.5	97.5	97.6	97.6	/	/	/
Input energy (Wi) (Wh)	/	54.6	126.6	251.7	376.3	503.4	/	/	/
Output energy (Wo) (Wh)	/	51.3	122.2	245.5	367.4	491.1	/	/	/
Energy efficiency(%)	/	94.0	96.5	97.5	97.6	97.6	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

TABLE		Efficiency recording and efficient calculation sheet							
power conditioner type	Grid-connected								
Model:	ASW13K-LT-G2 Pro								
Parameters of power conditioner	Minimum rated input voltage:125 V Nominal voltage: 630 V Maximum input voltage: 1100 V MPPT voltage range: 150 ~ 1000 V MPPT voltage range with full power: 400 ~ 850 V Rated output voltage: 230 V Rated output frequency: 50 Hz Rated output power: 13000 W Note: According to the user manual, the minimum MPPT input voltage is 150 V, and 90% of the inverter's maximum MPPT input voltage is 90%*1000 V=900 V. However, in this range, the inverter can't output full power. So, for this test, 400 V were used instead of 150 V, and 850 V were used instead of 900 V.								
PV input voltage	a) Manufacturer's minimum rated input voltage 400 V (±6 V)								
Temperature (°C)	25 °C ± 5 °C								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	402.4	402.5	402.6	402.6	402.7	/	/	/
Input voltage ripple (V)	/	4.0	4.1	3.9	4.0	4.1	/	/	/
Input current (A)	/	3.0	5.6	9.4	13.3	17.5	/	/	/
Input current ripple (A)	/	0.3	0.3	0.3	0.3	0.3	/	/	/
Input power (Pi) (kW)	/	1.417	3.373	6.815	10.059	13.409	/	/	/
Output power (Po) (kW)	/	1.344	3.259	6.630	9.797	13.050	/	/	/
Output efficiency (%)	/	94.8	96.6	97.3	97.4	97.3	/	/	/
Input energy (Wi) (Wh)	/	46.2	110.3	220.2	326.1	438.4	/	/	/
Output energy (Wo) (Wh)	/	43.9	106.5	214.2	317.6	426.7	/	/	/
Energy efficiency(%)	/	95.0	96.6	97.3	97.4	97.3	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

PV input voltage	b) The inverter's nominal voltage 630 V (± 9.45 V)								
Temperature ($^{\circ}$ C)	25 $^{\circ}$ C \pm 5 $^{\circ}$ C								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	629.4	629.4	631.5	629.7	630.1	/	/	/
Input voltage ripple (V)	/	1.0	1.4	1.1	1.3	1.5	/	/	/
Input current (A)	/	1.1	2.6	5.3	7.3	10.5	/	/	/
Input current ripple (A)	/	0.0	0.0	0.0	0.0	0.0	/	/	/
Input power (Pi) (kW)	/	1.368	3.303	6.652	9.191	13.214	/	/	/
Output power (Po) (kW)	/	1.313	3.224	6.543	9.044	12.994	/	/	/
Output efficiency (%)	/	96.0	97.6	98.4	98.4	98.3	/	/	/
Input energy (Wi) (Wh)	/	44.9	107.4	214.7	295.9	426.9	/	/	/
Output energy (Wo) (Wh)	/	43.0	104.9	211.2	291.2	419.8	/	/	/
Energy efficiency(%)	/	95.8	97.7	98.4	98.4	98.3	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

PV input voltage	c) 90% of the inverter's maximum input voltage 850 V (± 12.75 V)								
Temperature ($^{\circ}$ C)	25 $^{\circ}$ C \pm 5 $^{\circ}$ C								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	849.2	849.4	849.8	849.9	850.0	/	/	/
Input voltage ripple (V)		1.0	1.7	1.0	0.7	1.7	/	/	/
Input current (A)	/	0.9	2.0	3.9	5.9	7.9	/	/	/
Input current ripple (A)		0.0	0.0	0.0	0.0	0.0	/	/	/
Input power (Pi) (kW)	/	1.398	3.421	6.681	10.022	13.371	/	/	/
Output power (Po) (kW)	/	1.299	3.303	6.513	9.784	13.051	/	/	/
Output efficiency(%)	/	92.9	96.6	97.5	97.6	97.6	/	/	/
Input energy (Wi) (Wh)	/	45.7	106.9	219.2	325.1	436.8	/	/	/
Output energy (Wo) (Wh)	/	42.5	103.2	213.7	317.4	426.3	/	/	/
Energy efficiency(%)	/	93.0	96.5	97.5	97.6	97.6	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

TABLE		Efficiency recording and efficient calculation sheet							
power conditioner type	Grid-connected								
Model:	ASW12K-LT-G2 Pro								
Parameters of power conditioner	Minimum rated input voltage:125 V Nominal voltage: 630 V Maximum input voltage: 1100 V MPPT voltage range: 150 ~ 1000 V MPPT voltage range with full power: 400 ~ 850 V Rated output voltage: 230 V Rated output frequency: 50 Hz Rated output power: 12000 W Note: According to the user manual, the minimum MPPT input voltage is 150 V, and 90% of the inverter's maximum MPPT input voltage is 90%*1000 V=900 V. However, in this range, the inverter can't output full power. So, for this test, 400 V were used instead of 150 V, and 850 V were used instead of 900 V.								
PV input voltage	a) Manufacturer's minimum rated input voltage 400 V (±6 V)								
Temperature (°C)	25 °C ± 5 °C								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	402.4	402.4	402.5	402.6	402.7	/	/	/
Input voltage ripple (V)	/	3.6	4.1	4.0	4.2	4.0	/	/	/
Input current (A)	/	2.8	5.4	8.8	12.5	16.2	/	/	/
Input current ripple (A)	/	0.3	0.3	0.3	0.3	0.3	/	/	/
Input power (Pi) (kW)	/	1.306	3.170	6.282	9.369	12.415	/	/	/
Output power (Po) (kW)	/	1.235	3.060	6.110	9.126	12.091	/	/	/
Output efficiency (%)	/	94.6	96.5	97.3	97.4	97.4	/	/	/
Input energy (Wi) (Wh)	/	42.8	102.9	204.7	305.0	404.2	/	/	/
Output energy (Wo) (Wh)	/	40.5	99.3	199.0	297.1	393.6	/	/	/
Energy efficiency(%)	/	94.6	96.5	97.2	97.4	97.4	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

PV input voltage	b) The inverter's nominal voltage 630 V (± 9.45 V)								
Temperature ($^{\circ}\text{C}$)	25 $^{\circ}\text{C} \pm 5$ $^{\circ}\text{C}$								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	629.4	629.4	625.9	629.7	630.4	/	/	/
Input voltage ripple (V)	/	0.9	1.1	1.3	1.9	0.8	/	/	/
Input current (A)	/	1.0	2.4	4.9	7.3	9.7	/	/	/
Input current ripple (A)	/	0.0	0.0	0.0	0.0	0.0	/	/	/
Input power (Pi) (kW)	/	1.242	3.050	6.100	9.191	12.235	/	/	/
Output power (Po) (kW)	/	1.187	2.974	5.999	9.044	12.037	/	/	/
Output efficiency (%)	/	95.6	97.5	98.3	98.4	98.4	/	/	/
Input energy (Wi) (Wh)	/	40.5	100.8	196.1	295.9	392.9	/	/	/
Output energy (Wo) (Wh)	/	38.7	98.3	192.8	291.2	386.5	/	/	/
Energy efficiency(%)	/	95.6	97.5	98.3	98.4	98.4	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

PV input voltage	c) 90% of the inverter's maximum input voltage 850 V (± 12.75 V)								
Temperature ($^{\circ}$ C)	25 $^{\circ}$ C \pm 5 $^{\circ}$ C								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	849.6	849.7	849.8	849.9	849.9	/	/	/
Input voltage ripple (V)		1.5	1.5	0.5	0.9	0.7	/	/	/
Input current (A)	/	0.8	1.8	3.6	5.4	7.3	/	/	/
Input current ripple (A)		0.0	0.0	0.0	0.0	0.0	/	/	/
Input power (Pi) (kW)	/	1.339	3.113	6.151	9.256	12.351	/	/	/
Output power (Po) (kW)	/	1.252	3.004	5.992	9.035	12.059	/	/	/
Output efficiency(%)	/	93.5	96.5	97.4	97.6	97.6	/	/	/
Input energy (Wi) (Wh)	/	43.7	101.7	202.1	301.8	402.8	/	/	/
Output energy (Wo) (Wh)	/	40.9	98.1	196.9	294.6	393.3	/	/	/
Energy efficiency(%)	/	93.6	96.5	97.4	97.6	97.6	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

TABLE		Efficiency recording and efficient calculation sheet							
power conditioner type	Grid-connected								
Model:	ASW10K-LT-G2 Pro								
Parameters of power conditioner	Minimum rated input voltage:125 V Nominal voltage: 630 V Maximum input voltage: 1100 V MPPT voltage range: 150 ~ 1000 V MPPT voltage range with full power: 400 ~ 850 V Rated output voltage: 230 V Rated output frequency: 50 Hz Rated output power: 10000 W Note: According to the user manual, the minimum MPPT input voltage is 150 V, and 90% of the inverter's maximum MPPT input voltage is 90%*1000 V=900 V. However, in this range, the inverter can't output full power. So, for this test, 400 V were used instead of 150 V, and 850 V were used instead of 900 V.								
PV input voltage	a) Manufacturer's minimum rated input voltage 400 V (± 6 V)								
Temperature ($^{\circ}$ C)	25 $^{\circ}$ C \pm 5 $^{\circ}$ C								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	402.4	402.5	402.5	402.6	402.6	/	/	/
Input voltage ripple (V)	/	3.7	3.9	4.0	4.1	3.9	/	/	/
Input current (A)	/	2.5	4.7	7.6	10.6	13.6	/	/	/
Input current ripple (A)	/	0.3	0.3	0.3	0.3	0.3	/	/	/
Input power (Pi) (kW)	/	1.137	2.602	5.210	7.825	10.252	/	/	/
Output power (Po) (kW)	/	1.070	2.502	5.059	7.619	9.986	/	/	/
Output efficiency (%)	/	94.1	96.2	97.1	97.4	97.4	/	/	/
Input energy (Wi) (Wh)	/	37.0	84.8	170.0	255.0	334.6	/	/	/
Output energy (Wo) (Wh)	/	34.8	81.6	165.1	248.3	325.9	/	/	/
Energy efficiency(%)	/	94.1	96.2	97.1	97.4	97.4	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

PV input voltage	b) The inverter's nominal voltage 630 V (± 9.45 V)								
Temperature ($^{\circ}\text{C}$)	25 $^{\circ}\text{C} \pm 5$ $^{\circ}\text{C}$								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	629.4	629.4	626.5	627.5	629.5	/	/	/
Input voltage ripple (V)	/	1.0	1.0	1.0	0.8	0.9	/	/	/
Input current (A)	/	0.9	2.0	4.1	6.1	8.1	/	/	/
Input current ripple (A)	/	0.0	0.0	0.0	0.0	0.0	/	/	/
Input power (Pi) (kW)	/	1.053	2.532	5.091	7.693	10.190	/	/	/
Output power (Po) (kW)	/	0.999	2.463	5.003	7.570	10.027	/	/	/
Output efficiency (%)	/	94.9	97.3	98.3	98.4	98.4	/	/	/
Input energy (Wi) (Wh)	/	34.4	82.8	152.6	242.8	327.5	/	/	/
Output energy (Wo) (Wh)	/	32.7	80.6	150.0	238.9	322.3	/	/	/
Energy efficiency(%)	/	95.1	97.3	98.3	98.4	98.4	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

PV input voltage	c) 90% of the inverter's maximum input voltage 850 V (± 12.75 V)								
Temperature ($^{\circ}$ C)	25 $^{\circ}$ C \pm 5 $^{\circ}$ C								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	849.6	849.7	849.7	849.8	849.9	/	/	/
Input voltage ripple (V)		1.3	1.2	1.1	1.0	0.7	/	/	/
Input current (A)	/	0.7	1.5	3.0	4.5	6.0	/	/	/
Input current ripple (A)		0.0	0.0	0.0	0.0	0.0	/	/	/
Input power (Pi) (kW)	/	1.104	2.602	5.144	7.703	10.277	/	/	/
Output power (Po) (kW)	/	1.019	2.501	5.003	7.515	10.035	/	/	/
Output efficiency(%)	/	92.3	96.1	97.3	97.6	97.6	/	/	/
Input energy (Wi) (Wh)	/	35.8	84.5	168.0	250.4	336.0	/	/	/
Output energy (Wo) (Wh)	/	33.0	81.2	163.4	244.2	328.1	/	/	/
Energy efficiency(%)	/	92.2	96.1	97.3	97.5	97.6	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

TABLE		Efficiency recording and efficient calculation sheet							
power conditioner type	Grid-connected								
Model:	ASW8K-LT-G2 Pro								
Parameters of power conditioner	Minimum rated input voltage:125 V Nominal voltage: 630 V Maximum input voltage: 1100 V MPPT voltage range: 150 ~ 1000 V MPPT voltage range with full power: 400 ~ 850 V Rated output voltage: 230 V Rated output frequency: 50 Hz Rated output power: 8000 W Note: According to the user manual, the minimum MPPT input voltage is 150 V, and 90% of the inverter's maximum MPPT input voltage is 90%*1000 V=900 V. However, in this range, the inverter can't output full power. So, for this test, 400 V were used instead of 150 V, and 850 V were used instead of 900 V.								
PV input voltage	a) Manufacturer's minimum rated input voltage 400 V (±6 V)								
Temperature (°C)	25 °C ± 5 °C								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	399.9	402.4	402.5	402.5	402.5	/	/	/
Input voltage ripple (V)	/	3.9	4.2	4.2	3.7	4.1	/	/	/
Input current (A)	/	2.2	4.1	6.5	8.7	11.2	/	/	/
Input current ripple (A)	/	0.3	0.3	0.3	0.3	0.3	/	/	/
Input power (Pi) (kW)	/	1.001	2.167	4.225	6.229	8.301	/	/	/
Output power (Po) (kW)	/	0.937	2.078	4.092	6.058	8.086	/	/	/
Output efficiency (%)	/	93.6	95.9	96.9	97.3	97.4	/	/	/
Input energy (Wi) (Wh)	/	32.7	70.6	137.4	202.4	270.0	/	/	/
Output energy (Wo) (Wh)	/	30.7	67.7	133.1	196.9	263.0	/	/	/
Energy efficiency(%)	/	93.9	95.9	96.9	97.3	97.4	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

PV input voltage	b) The inverter's nominal voltage 630 V (± 9.45 V)								
Temperature ($^{\circ}$ C)	25 $^{\circ}$ C \pm 5 $^{\circ}$ C								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	629.4	627.2	632.2	629.2	627.1	/	/	/
Input voltage ripple (V)	/	1.2	0.9	0.8	1.1	1.2	/	/	/
Input current (A)	/	0.8	1.7	3.2	4.9	6.5	/	/	/
Input current ripple (A)	/	0.0	0.0	0.0	0.0	0.0	/	/	/
Input power (Pi) (kW)	/	0.902	2.085	4.092	6.144	8.192	/	/	/
Output power (Po) (kW)	/	0.850	2.031	4.014	6.042	8.061	/	/	/
Output efficiency (%)	/	94.2	97.4	98.1	98.3	98.4	/	/	/
Input energy (Wi) (Wh)	/	29.5	67.2	129.3	194.0	261.0	/	/	/
Output energy (Wo) (Wh)	/	27.8	65.5	126.9	190.8	256.8	/	/	/
Energy efficiency(%)	/	94.2	97.5	98.1	98.4	98.4	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

PV input voltage	c) 90% of the inverter's maximum input voltage 850 V (± 12.75 V)								
Temperature ($^{\circ}$ C)	25 $^{\circ}$ C \pm 5 $^{\circ}$ C								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	847.2	844.2	848.3	848.6	849.2	/	/	/
Input voltage ripple (V)		1.3	0.7	1.2	0.9	0.8	/	/	/
Input current (A)	/	0.6	1.2	2.4	3.6	4.8	/	/	/
Input current ripple (A)		0.0	0.0	0.0	0.0	0.0	/	/	/
Input power (Pi) (kW)	/	0.949	2.074	4.072	6.134	8.189	/	/	/
Output power (Po) (kW)	/	0.861	1.978	3.947	5.973	7.990	/	/	/
Output efficiency(%)	/	90.7	95.4	96.9	97.4	97.6	/	/	/
Input energy (Wi) (Wh)	/	29.5	64.8	124.6	190.1	253.2	/	/	/
Output energy (Wo) (Wh)	/	26.8	61.8	120.8	185.2	247.0	/	/	/
Energy efficiency(%)	/	90.8	95.4	97.0	97.4	97.6	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

TABLE		Efficiency recording and efficient calculation sheet							
power conditioner type	Grid-connected								
Model:	ASW6K-LT-G2 Pro								
Parameters of power conditioner	Minimum rated input voltage:125 V Nominal voltage: 560 V Maximum input voltage: 1100 V MPPT voltage range: 150 ~ 1000 V MPPT voltage range with full power: 270 ~ 850 V Rated output voltage: 230 V Rated output frequency: 50 Hz Rated output power: 6000 W Note: According to the user manual, the minimum MPPT input voltage is 150 V, and 90% of the inverter's maximum MPPT input voltage is 90%*1000 V=900 V. However, in this range, the inverter can't output full power. So, for this test, 270 V were used instead of 150 V, and 850 V were used instead of 900 V.								
PV input voltage	a) Manufacturer's minimum rated input voltage 270 V (± 4.05 V)								
Temperature ($^{\circ}$ C)	25 $^{\circ}$ C \pm 5 $^{\circ}$ C								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	270.0	269.7	269.9	268.6	269.0	/	/	/
Input voltage ripple (V)	/	0.0	0.0	0.0	0.0	0.0	/	/	/
Input current (A)	/	2.5	6.0	11.8	17.2	23.4	/	/	/
Input current ripple (A)	/	0.1	0.1	0.1	0.0	0.3	/	/	/
Input power (Pi) (kW)	/	0.662	1.628	3.181	4.609	6.290	/	/	/
Output power (Po) (kW)	/	0.604	1.523	3.018	4.394	6.013	/	/	/
Output efficiency (%)	/	91.2	93.6	94.9	95.3	95.6	/	/	/
Input energy (Wi) (Wh)	/	22.7	55.6	109.3	159.7	215.3	/	/	/
Output energy (Wo) (Wh)	/	20.7	52.0	103.7	152.2	205.8	/	/	/
Energy efficiency(%)	/	91.2	93.5	94.9	95.3	95.6	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

PV input voltage	b) The inverter's nominal voltage 560 V (± 8.4 V)								
Temperature ($^{\circ}\text{C}$)	25 $^{\circ}\text{C} \pm 5$ $^{\circ}\text{C}$								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	552.4	560.0	558.5	563.2	562.0	/	/	/
Input voltage ripple (V)	/	0.0	0.0	0.0	0.0	0.0	/	/	/
Input current (A)	/	1.1	2.8	5.7	8.4	11.0	/	/	/
Input current ripple (A)	/	0.0	0.0	0.1	0.2	0.3	/	/	/
Input power (Pi) (kW)	/	0.620	1.561	3.135	4.664	6.196	/	/	/
Output power (Po) (kW)	/	0.582	1.507	3.050	4.543	6.051	/	/	/
Output efficiency (%)	/	93.9	96.5	97.3	97.4	97.7	/	/	/
Input energy (Wi) (Wh)	/	21.3	58.1	122.4	162.2	217.4	/	/	/
Output energy (Wo) (Wh)	/	20.0	56.1	119.1	158.0	212.3	/	/	/
Energy efficiency(%)	/	93.9	96.6	97.3	97.4	97.7	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

PV input voltage	c) 90% of the inverter's maximum input voltage 850 V (± 12.75 V)								
Temperature ($^{\circ}$ C)	25 $^{\circ}$ C \pm 5 $^{\circ}$ C								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	846.8	846.5	848.7	849.4	849.0	/	/	/
Input voltage ripple (V)		0.0	0.0	0.0	0.0	0.0	/	/	/
Input current (A)	/	0.8	1.9	3.7	5.7	7.7	/	/	/
Input current ripple (A)		0.0	0.0	0.2	0.3	0.1	/	/	/
Input power (Pi) (kW)	/	0.665	1.568	3.116	4.642	6.219	/	/	/
Output power (Po) (kW)	/	0.618	1.504	3.022	4.507	6.041	/	/	/
Output efficiency(%)	/	92.9	95.9	97.0	97.1	97.1	/	/	/
Input energy (Wi) (Wh)	/	23.6	61.0	120.3	170.0	236.7	/	/	/
Output energy (Wo) (Wh)	/	21.9	58.5	116.7	165.0	229.9	/	/	/
Energy efficiency(%)	/	92.8	95.9	97.0	97.1	97.1	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

TABLE		Efficiency recording and efficient calculation sheet							
power conditioner type	Grid-connected								
Model:	ASW5K-LT-G2 Pro								
Parameters of power conditioner	Minimum rated input voltage:125 V Nominal voltage: 560 V Maximum input voltage: 1100 V MPPT voltage range: 150 ~ 1000 V MPPT voltage range with full power: 270 ~ 850 V Rated output voltage: 230 V Rated output frequency: 50 Hz Rated output power: 5000 W Note: According to the user manual, the minimum MPPT input voltage is 150 V, and 90% of the inverter's maximum MPPT input voltage is 90%*1000 V=900 V. However, in this range, the inverter can't output full power. So, for this test, 270 V were used instead of 150 V, and 850 V were used instead of 900 V.								
PV input voltage	a) Manufacturer's minimum rated input voltage 270 V (± 4.05 V)								
Temperature ($^{\circ}$ C)	25 $^{\circ}$ C \pm 5 $^{\circ}$ C								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	269.6	269.3	269.5	269.5	269.1	/	/	/
Input voltage ripple (V)	/	0.0	0.0	0.0	0.0	0.0	/	/	/
Input current (A)	/	2.1	5.0	9.8	14.7	19.5	/	/	/
Input current ripple (A)	/	0.1	0.1	0.1	0.1	0.2	/	/	/
Input power (Pi) (kW)	/	0.568	1.342	2.641	3.948	5.232	/	/	/
Output power (Po) (kW)	/	0.516	1.254	2.498	3.761	4.996	/	/	/
Output efficiency (%)	/	90.8	93.4	94.6	95.3	95.5	/	/	/
Input energy (Wi) (Wh)	/	20.5	46.8	99.6	135.9	181.2	/	/	/
Output energy (Wo) (Wh)	/	18.6	43.7	94.2	129.4	173.1	/	/	/
Energy efficiency(%)	/	90.7	93.4	94.6	95.2	95.5	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

PV input voltage	b) The inverter's nominal voltage 560 V (± 8.4 V)								
Temperature ($^{\circ}\text{C}$)	25 $^{\circ}\text{C} \pm 5$ $^{\circ}\text{C}$								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	559.3	553.6	558.6	559.8	558.0	/	/	/
Input voltage ripple (V)	/	0.0	0.0	0.0	0.0	0.0	/	/	/
Input current (A)	/	0.9	2.4	4.7	6.9	9.3	/	/	/
Input current ripple (A)	/	0.1	0.1	0.2	0.2	0.1	/	/	/
Input power (Pi) (kW)	/	0.503	1.310	2.587	3.866	5.157	/	/	/
Output power (Po) (kW)	/	0.468	1.260	2.512	3.770	5.031	/	/	/
Output efficiency (%)	/	93.0	96.2	97.1	97.5	97.6	/	/	/
Input energy (Wi) (Wh)	/	18.2	44.9	88.9	133.0	181.6	/	/	/
Output energy (Wo) (Wh)	/	17.0	43.2	86.3	130.0	177.2	/	/	/
Energy efficiency(%)	/	93.4	96.2	97.1	97.7	97.6	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

PV input voltage	c) 90% of the inverter's maximum input voltage 850 V (± 12.75 V)								
Temperature ($^{\circ}$ C)	25 $^{\circ}$ C \pm 5 $^{\circ}$ C								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	847.6	844.9	852.0	846.8	850.9	/	/	/
Input voltage ripple (V)		0.0	0.0	0.0	0.0	0.0	/	/	/
Input current (A)	/	0.7	1.6	3.2	4.6	6.4	/	/	/
Input current ripple (A)		0.0	0.1	0.1	0.3	0.2	/	/	/
Input power (Pi) (kW)	/	0.555	1.310	2.600	3.858	5.150	/	/	/
Output power (Po) (kW)	/	0.509	1.250	2.511	3.749	5.004	/	/	/
Output efficiency(%)	/	91.7	95.4	96.6	97.2	97.2	/	/	/
Input energy (Wi) (Wh)	/	20.7	44.8	88.3	133.0	175.0	/	/	/
Output energy (Wo) (Wh)	/	19.0	42.8	85.4	129.0	170.0	/	/	/
Energy efficiency(%)	/	91.8	95.5	96.7	97.0	97.1	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

TABLE		Efficiency recording and efficient calculation sheet							
power conditioner type	Grid-connected								
Model:	ASW4K-LT-G2 Pro								
Parameters of power conditioner	Minimum rated input voltage:125 V Nominal voltage: 560 V Maximum input voltage: 1100 V MPPT voltage range: 150 ~ 1000 V MPPT voltage range with full power: 270 ~ 850 V Rated output voltage: 230 V Rated output frequency: 50 Hz Rated output power: 4000 W Note: According to the user manual, the minimum MPPT input voltage is 150 V, and 90% of the inverter's maximum MPPT input voltage is 90%*1000 V=900 V. However, in this range, the inverter can't output full power. So, for this test, 270 V were used instead of 150 V, and 850 V were used instead of 900 V.								
PV input voltage	a) Manufacturer's minimum rated input voltage 270 V (± 4.05 V)								
Temperature (°C)	25 °C \pm 5 °C								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	268.7	269.4	269.4	268.8	269.3	/	/	/
Input voltage ripple (V)	/	0.0	0.0	0.0	0.0	0.0	/	/	/
Input current (A)	/	1.7	4.0	8.0	11.8	15.6	/	/	/
Input current ripple (A)	/	0.1	0.1	0.1	0.1	0.2	/	/	/
Input power (Pi) (kW)	/	0.458	1.084	2.156	3.174	4.195	/	/	/
Output power (Po) (kW)	/	0.411	1.006	2.029	3.012	3.997	/	/	/
Output efficiency (%)	/	89.7	92.8	94.1	94.9	95.3	/	/	/
Input energy (Wi) (Wh)	/	15.6	39.5	75.1	108.4	145.8	/	/	/
Output energy (Wo) (Wh)	/	14.1	36.6	70.6	102.8	138.9	/	/	/
Energy efficiency(%)	/	90.4	92.7	94.0	94.8	95.3	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

PV input voltage	b) The inverter's nominal voltage 560 V (± 8.4 V)								
Temperature ($^{\circ}\text{C}$)	25 $^{\circ}\text{C} \pm 5$ $^{\circ}\text{C}$								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	550.4	559.1	561.6	559.1	558.6	/	/	/
Input voltage ripple (V)	/	0.0	0.0	0.0	0.0	0.0	/	/	/
Input current (A)	/	0.8	1.9	3.7	5.6	7.4	/	/	/
Input current ripple (A)	/	0.1	0.1	0.1	0.1	0.2	/	/	/
Input power (Pi) (kW)	/	0.441	1.051	2.077	3.098	4.117	/	/	/
Output power (Po) (kW)	/	0.408	1.006	2.016	3.015	4.016	/	/	/
Output efficiency (%)	/	92.5	95.7	97.1	97.3	97.5	/	/	/
Input energy (Wi) (Wh)	/	15.1	36.1	70.9	109.9	142.9	/	/	/
Output energy (Wo) (Wh)	/	13.9	34.6	68.8	107.0	139.4	/	/	/
Energy efficiency(%)	/	92.1	95.8	97.0	97.4	97.6	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

PV input voltage	c) 90% of the inverter's maximum input voltage 850 V (± 12.75 V)								
Temperature ($^{\circ}$ C)	25 $^{\circ}$ C \pm 5 $^{\circ}$ C								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	852.7	846.3	848.6	850.1	848.1	/	/	/
Input voltage ripple (V)		0.0	0.0	0.0	0.0	0.0	/	/	/
Input current (A)	/	0.5	1.2	2.6	3.6	4.9	/	/	/
Input current ripple (A)		0.0	0.0	0.1	0.1	0.2	/	/	/
Input power (Pi) (kW)	/	0.442	1.054	2.088	3.075	4.128	/	/	/
Output power (Po) (kW)	/	0.398	1.000	2.013	2.984	4.015	/	/	/
Output efficiency(%)	/	90.0	94.9	96.4	97.0	97.3	/	/	/
Input energy (Wi) (Wh)	/	15.3	36.3	71.0	105.0	142.8	/	/	/
Output energy (Wo) (Wh)	/	13.8	34.4	68.5	101.9	138.9	/	/	/
Energy efficiency(%)	/	90.2	94.8	96.5	97.0	97.3	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

TABLE		Efficiency recording and efficient calculation sheet							
power conditioner type	Grid-connected								
Model:	ASW3K-LT-G2 Pro								
Parameters of power conditioner	Minimum rated input voltage:125 V Nominal voltage: 560 V Maximum input voltage: 1100 V MPPT voltage range: 150 ~ 1000 V MPPT voltage range with full power: 270 ~ 850 V Rated output voltage: 230 V Rated output frequency: 50 Hz Rated output power: 3000 W Note: According to the user manual, the minimum MPPT input voltage is 150 V, and 90% of the inverter's maximum MPPT input voltage is 90%*1000 V=900 V. However, in this range, the inverter can't output full power. So, for this test, 270 V were used instead of 150 V, and 850 V were used instead of 900 V.								
PV input voltage	a) Manufacturer's minimum rated input voltage 270 V (± 4.05 V)								
Temperature (°C)	25 °C \pm 5 °C								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	269.7	269.3	269.6	269.9	269.3	/	/	/
Input voltage ripple (V)	/	0.0	0.0	0.0	0.0	0.0	/	/	/
Input current (A)	/	1.3	3.0	5.9	8.9	11.7	/	/	/
Input current ripple (A)	/	0.1	0.1	0.1	0.2	0.1	/	/	/
Input power (Pi) (kW)	/	0.334	0.814	1.596	2.391	3.161	/	/	/
Output power (Po) (kW)	/	0.295	0.752	1.497	2.257	3.002	/	/	/
Output efficiency (%)	/	88.3	92.4	93.8	94.4	95.0	/	/	/
Input energy (Wi) (Wh)	/	11.6	27.9	55.0	84.2	109.8	/	/	/
Output energy (Wo) (Wh)	/	10.2	25.8	51.6	79.5	104.3	/	/	/
Energy efficiency(%)	/	87.9	92.5	93.8	94.4	95.0	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

PV input voltage	b) The inverter's nominal voltage 560 V (± 8.4 V)								
Temperature ($^{\circ}\text{C}$)	25 $^{\circ}\text{C} \pm 5$ $^{\circ}\text{C}$								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	561.4	562.7	557.3	558.2	558.9	/	/	/
Input voltage ripple (V)	/	0.0	0.0	0.0	0.0	0.0	/	/	/
Input current (A)	/	0.6	1.4	2.8	4.2	5.6	/	/	/
Input current ripple (A)	/	0.1	0.1	0.1	0.1	0.3	/	/	/
Input power (Pi) (kW)	/	0.332	0.788	1.556	2.326	3.093	/	/	/
Output power (Po) (kW)	/	0.300	0.748	1.502	2.258	3.010	/	/	/
Output efficiency (%)	/	90.4	94.9	96.5	97.1	97.3	/	/	/
Input energy (Wi) (Wh)	/	12.0	27.2	54.5	80.3	108.0	/	/	/
Output energy (Wo) (Wh)	/	10.8	25.8	52.6	78.0	105.1	/	/	/
Energy efficiency(%)	/	90.0	94.9	96.5	97.1	97.3	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

PV input voltage	c) 90% of the inverter's maximum input voltage 850 V (± 12.75 V)								
Temperature ($^{\circ}$ C)	25 $^{\circ}$ C \pm 5 $^{\circ}$ C								
Operating period for energy measurement (min)	2								
Percentage of rated output VA	/	10%	25%	50%	75%	100%	120%(*)	/	/
Input voltage (V)	/	845.1	850.6	849.2	850.6	845.1	/	/	/
Input voltage ripple (V)		0.0	0.0	0.0	0.0	0.0	/	/	/
Input current (A)	/	3.7	2.9	1.8	2.9	3.7	/	/	/
Input current ripple (A)		0.1	0.0	0.0	0.1	0.1	/	/	/
Input power (Pi) (kW)	/	3.094	2.329	1.570	2.329	3.094	/	/	/
Output power (Po) (kW)	/	3.002	2.250	1.506	2.250	3.002	/	/	/
Output efficiency(%)	/	97.0	96.6	95.9	96.6	97.0	/	/	/
Input energy (Wi) (Wh)	/	107.0	81.2	53.8	81.4	107.1	/	/	/
Output energy (Wo) (Wh)	/	103.8	78.5	51.6	78.7	103.9	/	/	/
Energy efficiency(%)	/	97.0	96.7	95.9	96.7	97.0	/	/	/
Remark: (*) If limited by design, inverter is not capable to operate with the 120% of rated output load, test under this condition is waived.									

TABLE	No load loss	P
power conditioner type	Utility-interactive	
ASW20K-LT-G2 Pro		
Measure input voltage (V)	630.4	
Measured input power (W)	23	
ASW17K-LT-G2 Pro		
Measure input voltage (V)	630.5	
Measured input power (W)	23	
ASW15K-LT-G2 Pro		
Measure input voltage (V)	630.5	
Measured input power (W)	23	
ASW13K-LT-G2 Pro		
Measure input voltage (V)	630.5	
Measured input power (W)	23	
ASW12K-LT-G2 Pro		
Measure input voltage (V)	630.5	
Measured input power (W)	23	
ASW10K-LT-G2 Pro		
Measure input voltage (V)	630.5	
Measured input power (W)	22	
ASW8K-LT-G2 Pro		
Measure input voltage (V)	630.5	
Measured input power (W)	22	
ASW6K-LT-G2 Pro		
Measure input voltage (V)	560.4	
Measured input power (W)	8	
ASW5K-LT-G2 Pro		
Measure input voltage (V)	560.7	
Measured input power (W)	7	
ASW4K-LT-G2 Pro		
Measure input voltage (V)	560.7	
Measured input power (W)	7	

ASW3K-LT-G2 Pro	
Measure input voltage (V)	560.7
Measured input power (W)	6
Remark: No load loss is measured when the power conditioner works at rated input voltage and its load is disconnected.	

TABLE	Standby loss	P
power conditioner type	Utility-interactive	
ASW20K-LT-G2 Pro		
Measure input voltage (V)	230.0	
Measured input power (W)	-8	
ASW17K-LT-G2 Pro		
Measure input voltage (V)	230	
Measured input power (W)	-8	
ASW15K-LT-G2 Pro		
Measure input voltage (V)	230	
Measured input power (W)	-8	
ASW13K-LT-G2 Pro		
Measure input voltage (V)	230	
Measured input power (W)	-8	
ASW12K-LT-G2 Pro		
Measure input voltage (V)	230	
Measured input power (W)	-8	
ASW10K-LT-G2 Pro		
Measure input voltage (V)	230	
Measured input power (W)	-8	
ASW8K-LT-G2 Pro		
Measure input voltage (V)	230	
Measured input power (W)	-8	
ASW6K-LT-G2 Pro		
Measure input voltage (V)	230.1	
Measured input power (W)	-1	
ASW5K-LT-G2 Pro		
Measure input voltage (V)	230.0	
Measured input power (W)	-1	
ASW4K-LT-G2 Pro		
Measure input voltage (V)	230.0	
Measured input power (W)	-1	

ASW3K-LT-G2 Pro	
Measure input voltage (V)	230.0
Measured input power (W)	-1
Remark: Standby loss is measured when the power conditioner works at rated input voltage and in standby mode.	

--- End of test report---

ATTACHMENT I


(Pictures of the EUT and Electrical Schemes)

1 PICTURES

Front view



Back Side

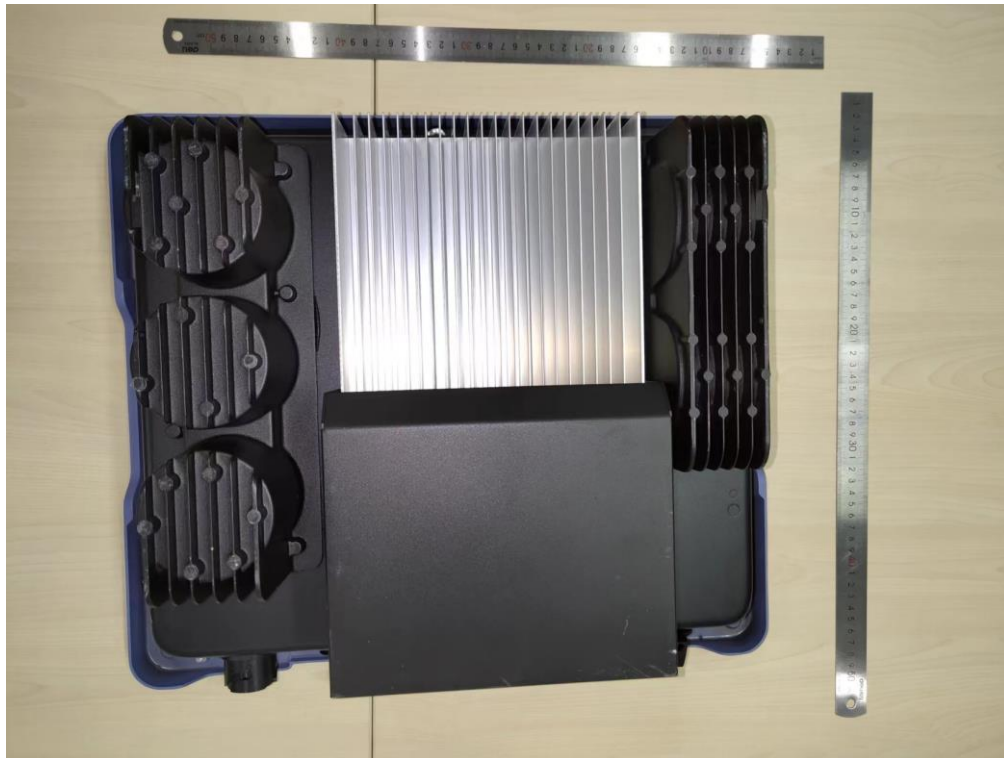

Connection interface



Top Side




Left Side



Right side



Inside

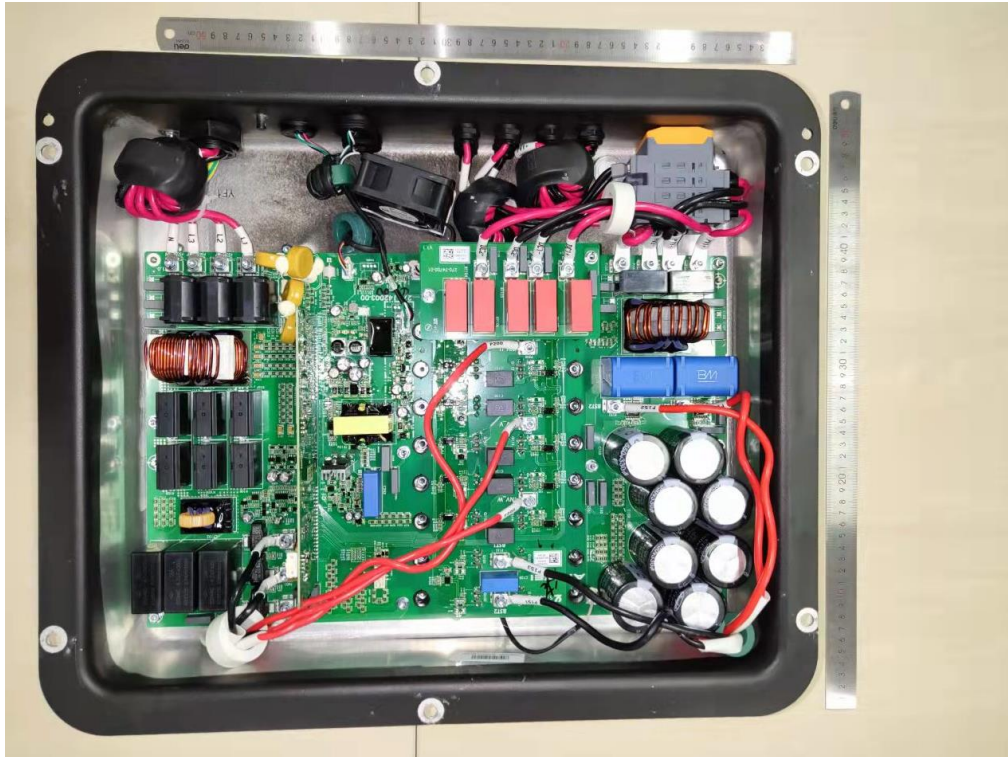

Serial number

Model: ASW8K-LT-G2 Pro

< Inverter information


Inverter serial number SP00100032220003


Model: ASW20K-LT-G2 Pro


SN. SZ00200012110003


Software version

< HD 30.7 K/s 94% 09:52
Inverter update


 Please do not access the monitoring device via other means during the firmware upgrade process

Master
Firmware versionV610-03043-01
 Local upgrade

Slave
Firmware versionV610-60009-00
 Local upgrade

Safety
Firmware versionV610-11009-00
 Local upgrade

2 ELECTRICAL SCHEMES

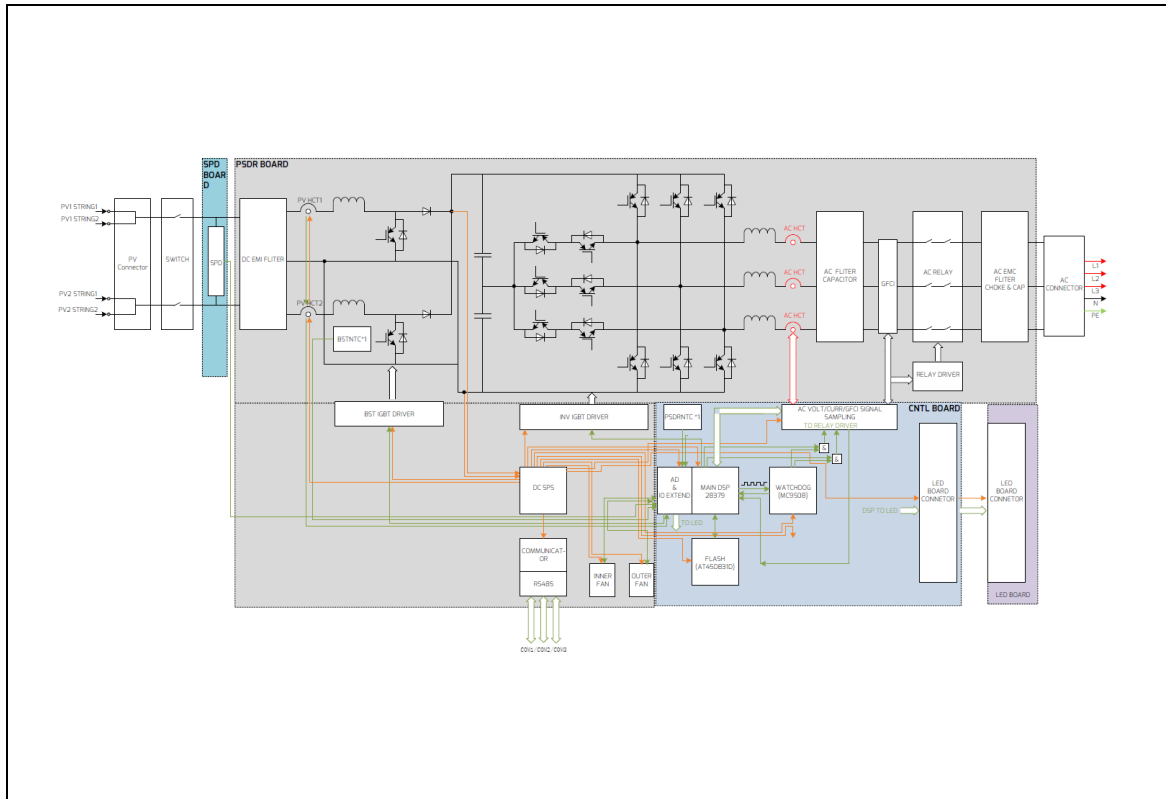

ATTACHMENT II

(Testing information)

1 TESTING CIRCUIT

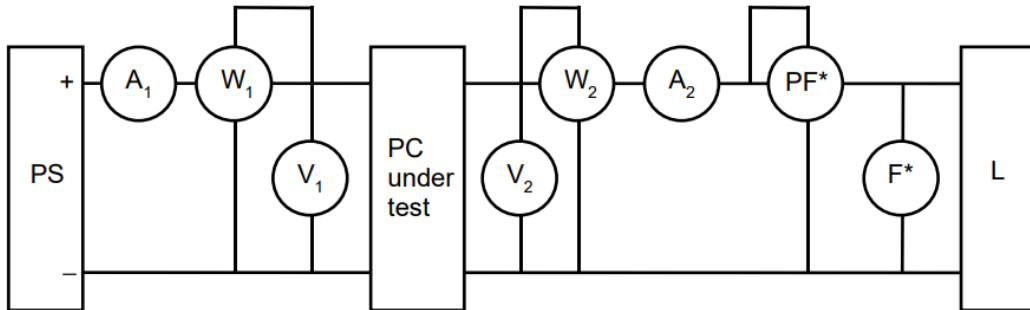


Figure 1a – Stand-alone type

IEC 1566/99

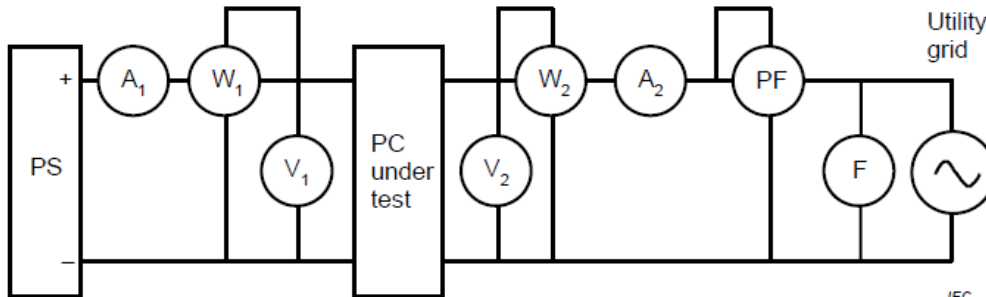


Figure 1b – Utility-interactive type

IEC 1567/99

- | | |
|---|-------------------------------------|
| PC power conditioner | L load |
| PS variable voltage-current d.c. power supply | F frequency meter |
| A ₁ DC ammeter | V ₁ DC voltmeter |
| A ₂ AC or d.c. ammeter | V ₂ AC or d.c. voltmeter |
| W ₁ DC wattmeter | PF power factor meter |
| W ₂ AC or d.c. wattmeter | |

Current and voltage clamps have been connected to the inverter input/output for all the tests.

All the tests and checks have been performed in accordance with the reference standard under testing.

2 TESTING EQUIPMENT

From	No.	Equipment Name	Trademark / Model	Equipment No.	Calibration Period
SGS	1	Digital Oscilloscope	Tektronix/ MDO3022	GZE007-41	2020/11/06 to 2021/11/05 2021/10/20 to 2022/10/19
	2	Differential probe	Tektronix/ P5210A	GZE007-25	2021/02/07 to 2022/02/06 2022/01/20 to 2023/01/19
	3	Current probe	CA/PAC 12	GZE007-31	2020/11/15 to 2021/11/14 2021/10/28 to 2022/10/27
	4	Power Analyzer	ZLG/ PA5000H	GZE006-92	2020/08/06 to 2021/08/05 2021/08/23 to 2022/08/22
	5	Power Analyzer	YOKOGAWA/ WT3000	GZE006-72	2020/07/14 to 2021/07/13 2021/06/30 to 2022/06/29
	6	Temperature & Humidity meter	HUATO/ A2000-TB	GZE020-64	2020/04/23 to 2021/04/22 2021/04/13 to 2022/04/12
	7	Temperature & Humidity meter	HUATO/ S520-EX	GZE020-68	2021/08/18 to 2022/08/17

Items	Specifications
1) PV array simulator	
a) Voltage range	0 – 1800 Vdc
b) Current range	0 – 30 A
2) AC power source	
a) Output wiring	Three phase
b) Output capacity	30 kVA
c) Output voltage	0 - 300 Vrms
d) Output frequency	30 - 100 Hz
e) Voltage stability	/
f) Output voltage distortion	/
3) Digital meter	
a) Voltage range	0 – 1000 Vdc, 0 – 1000 Va.c.
b) Current range	0 – 10 A
c) Frequency range (accuracy)	0 – 999.99 kHz (0.005%)
d) Measurement items	Voltage (V) Current (A) Active power (W) Reactive power (Var) Volt-ampere (VA) Power factor (PF) Frequency (Hz) Electric energy (Wh)
4) Waveform recorder	
a) Sampling speed	2.5GS/s
b) Recording device	Memory record and USB reading
c) Time accuracy	± 10 ppm
5) AC load	
a) Resistive load	Capacity: 68.33 kW
b) Inductive load	Capacity: 68.33 kVAr
c) Capacitive load	Capacity: 68.33 kVAr

3 MEASUREMENT UNCERTAINTY

Magnitude	Uncertainty
Voltage measurement uncertainty	±1.5 %
Current measurement uncertainty	±2.0 %
Frequency measurement uncertainty	±0.2 %
Time measurement uncertainty	±0.2 %
Power measurement uncertainty	±2.5 %
Phase Angle	±1°
Temperature	±3° C

Note: Measurements uncertainties showed in this table are maximum allowable uncertainties. The measurement uncertainties associated with other parameters measured during the tests are in the laboratory at disposal of the solicitant.